



Triple PreFilter & Booster Pump

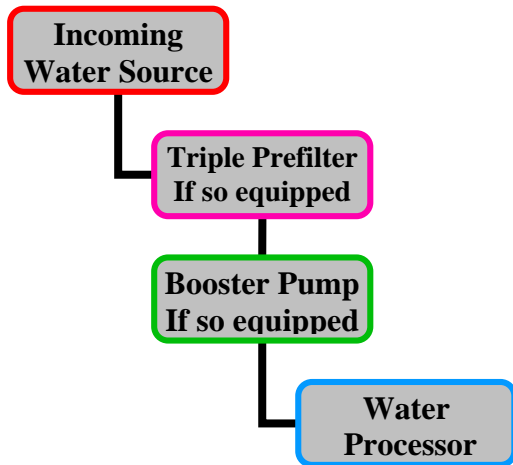

The Triple PreFilter is always installed closest to the source water. The Booster Pump goes before the processor and after the PreFilter if so equipped. Direction of FLOW is marked on both the Triple PreFilter and the Booster Pump. Point FLOW ARROWS towards the processor.

In the Picture Below you can physically see the order and connections for Booster pump, Processor and Triple PreFilter.

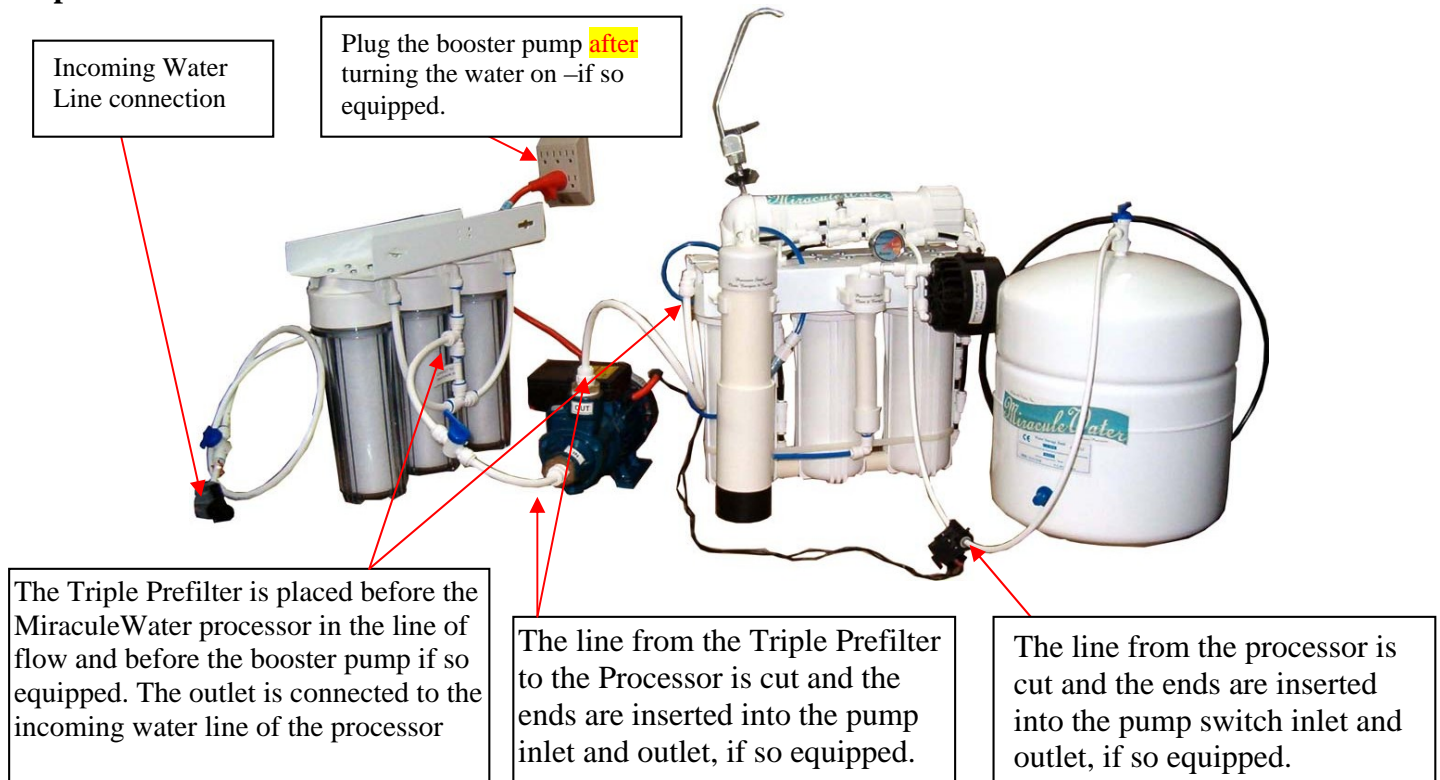

Firmly insert tubing when making these connections. To prevent leaks insure that the tubing is free of scratches before inserting into any fitting. Always insert tubing straight into the fitting and completely [about 1/2 inch]. Trim excess tubing as needed for best performance of the processor. Follow common sense flow pattern of connecting inlets and outlets as needed for your installation.